

BA-400 80 ()

GENERAL DATA



ANTI-VIBRATING FLANGE 400°/2H


MANUFACTURING FEATURES

- Flexible polyurethane coupling flange with fiberglass fabric to avoid possible vibrations to the installation.
- 160 mm width and supplied with 2 fixing clamps.
- Certified according to the European standard EN 12101-3 400°C/2h. Fire classification: M0.

TECHNICAL DATA

approx. weight 0.46 Kg

DIMENSIONS

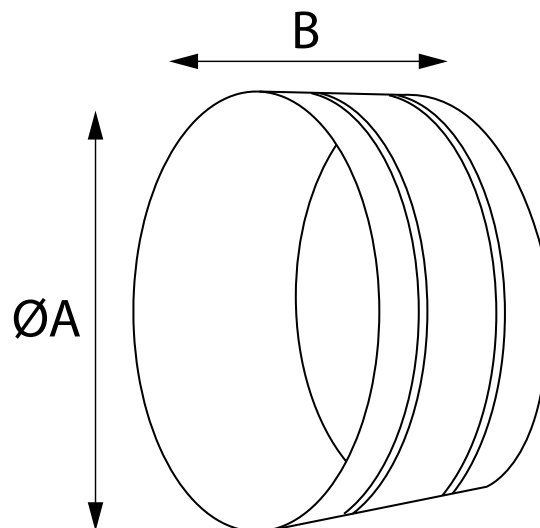

Dimensions (mm)

B	160	ØA	810
---	-----	----	-----