

## INT 160 6P A ( )

### GENERAL DATA

#### SAFETY SWITCH

#### MANUFACTURING FEATURES

- Safety start-stop switches according to IEC 60947-1 and IEC 60947-3.
- IP65 and always equipped an auxiliary contact.
- Useful for switching off the current before handling the fan.

\*Máx. thermal current air (A)



### TECHNICAL DATA


approx. weight

6.50 Kg

I

160 A

### DIMENSIONS

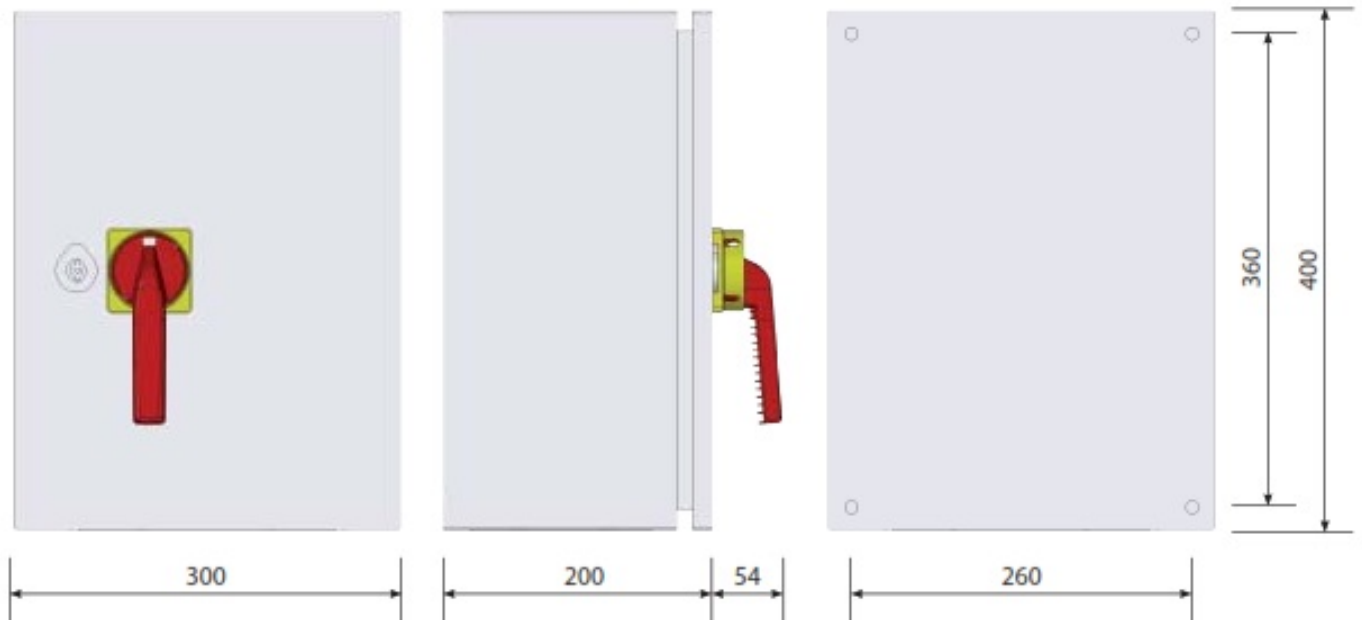

## WIRING DIAGRAM

3p

n° ref.	1 ○	3 ○	5 ○	7 ○	9 ○	11 ○
Coaxial	2 ○	4 ○	6 ○	8 ○	10 ○	12 ○
1-0						
2-1	X	X	X		X	

6p

n° ref.	1 ○	3 ○	5 ○	7 ○	9 ○	11 ○	13 ○	15 ○
Coaxial	2 ○	4 ○	6 ○	8 ○	10 ○	12 ○	14 ○	
1-0								
2-1	X	X	X	X	X	X	X	

x Contacto cerrado /  
contact closed

- Intensidad coaxial: 12A / Coaxial intensity: 12A
- Mando de seguridad: Rojo/amarillo / Safety control: Red/yellow